

TD5A/TD5台式低速离心机

TD5A/TD5 Table-type Low speed Centrifuge

技术参数 Specification

产品名称 Model	TD5A	TD5
最高转速 Max Speed (r/min)	5500	5000
最大离心力 Max RCF (×g)	4800	4800
最大容量 Max Capacity	4 × 250ml	4 × 250ml
定时范围 Time range	0-99h59min	
运行程序 Operation programme	20	
控制及驱动系统 Control and driver system	无刷变频电机，微机控制，直接驱动 Frequency motor, micro control, direct drive	
总功率 Total power	500w	
噪音 Noise	≤65dB	
电源 Power	AC220V 50Hz	
重量 Weight	35kg	
外形尺寸 Dimension (L × W × H)	600 × 540 × 360mm	

产品名称 Model	容量 Capacity	TD5A		TD5	
		转速 Speed (r/min)	离心力 RCF (×g)	转速 Speed (r/min)	离心力 RCF (×g)
角转子 Angle rotor	12 × 10ml	5500	4328		
水平转子 Swing bucket rotor	12 × 15ml	5000	4500		
	24 × 10ml	5000	4500		
	4 × 250ml	4000	3290	4000	3290
适配器 Adaptor	8 × 50ml				
	24 × 15ml				
	32 × 10ml				
	40 × 5ml				
水平转子 Swing bucket rotor	4 × 50ml	5000	4600	5000	4600
	4 × 100ml	5000	4800	5000	4800
	8 × 50ml	4000	2810	4000	2810
	24 × 15ml	4000	2810	4000	2810
	32 × 15ml	4000	2810	4000	2810
	32 × 10ml	4000	2810	4000	2810
	48 × 5ml/2ml (真空采血管 Vacuum tube)	4000	2940	4000	2940
	76 × 5ml/2ml (真空采血管 Vacuum tube)	4000	3100	4000	3100
水平酶标板转子 Swing micro-plate rotor	2 × 2 × 96孔 (holes)	4000	2360	4000	2360




特性

- 整机人机学增强型，流线设计，更加安全美观实用。
- TFT真彩大屏幕触控液晶显示，智能化控制、简单方便地操作、触摸面板，同时显示设定参数和运行参数。
- 采用全钢结构，不锈钢离心腔，坚固耐用。
- 采用无刷变频电机，免维护，无粉尘污染。
- 10种升、降速率选择。可储存20个用户程序，用户可直接调用，开机为上次使用程序。
- 设有离心力显示专用键。
- 采用静音机电一体化电机门锁。

Features

- Enhanced ergonomics to achieve a streamline design that is safe, aesthetic and practical.
- With TFT true-color LCD wide-screen touch monitor featured by intelligent control, easy and convenient operation, a touch panel and a simultaneous indication of both the set parameters and operation ones.
- With a complete steel structure and a stainless steel centrifuge cavity, it is sturdy and durable.
- Variable-frequency brushless motor that is maintenance and dust-free.
- 10 kinds of speed-up and speed-down options. Can store 20 user program which can be directly used by the user. The program previously used with be running when the machine is started.
- With a dedicated key indicating the centrifugal force.
- With a motor gate lock mute mechanical & electrical integration.

可选配件 Optional fittings

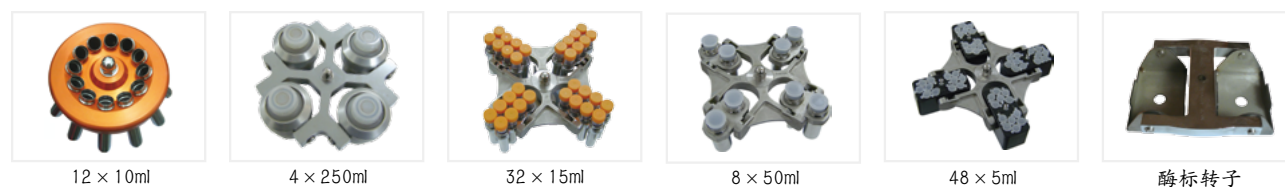

12 × 10ml

4 × 250ml

32 × 15ml

8 × 50ml

48 × 5ml

酶标转子